


B SERIES, ASG FEMALE STRAIGHT - SR

- Connector series: ASG
- Gender: Female
- Coding: G
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: ASG.XB.XXX.XXXXXXZ
- Mated with: PSG/PAG/MSG series
"X" refers to part number definition

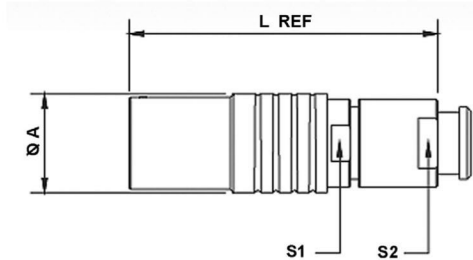


General Information

Size	Dimensions (mm)			
	A	L	S1	S2
00	6.8	34.0	5.5	6.0
0B	9.5	34.5	8.0	7.0
1B	12.5	39.5	10.0	9.0
2B	16.5	46.0	13.0	12.0
3B	19.0	54.5	15.0	15.0

Ambient temperature:	- 55 C to + 200 C
Connector insert:	PEEK
Connector contacts:	Bronze, Gold Plated
Coupling nut/screw:	Brass, Nickel Plated
Connector body:	Brass, Cr Plated
Insulation resistance:	≥ 100 M Ω
IP rating	IP50

B SERIES, ASG FEMALE STRAIGHT

- Connector series: ASG
- Gender: Female
- Coding: G
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: ASG.XB.XXX.XXXXXX
- Mated with: PSG/PAG/MSG series
"X" refers to part number definition

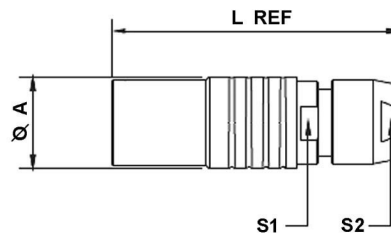

General Information

Size	Dimensions (mm)			
	A	L	S1	S2
00	6.8	26.0	5.5	5.0
0B	9.5	35.5	8.0	7.0
1B	12.5	40.5	10.0	9.0
2B	16.5	47.0	13.0	12.0
3B	19.0	56.0	15.0	14.0

Ambient temperature:	- 55 C to + 200 C
Connector insert:	PEEK
Connector contacts:	Bronze, Gold Plated
Coupling nut/screw:	Brass, Nickel Plated
Connector body:	Brass, Cr Plated
Insulation resistance:	≥ 100 M Ω
IP rating	IP50