




## M12 Female Field Wirable Assembly, Straight, Solder

- Connector series: M12
- Gender: Female
- Coding: A,B,C,D
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MB12FA\*FF\*\*ST

\* refers to coding type  
\*\* refers to pins number

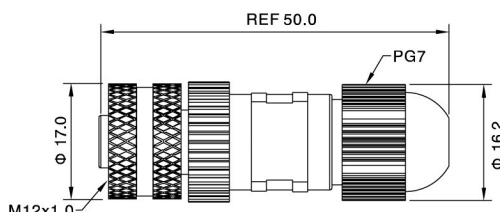

### General information



Standard:	IEC 61076-2-101	Insulation resistance:	≥ 100MΩ
Ambient temperature:	-25°C ~ +90°C	Contact resistance :	≤ 5mΩ
Connector insert:	TPU; PA	Shielding:	Unavailable
Connector contacts:	Brass with gold plated	Suitable cable Dia:	4~5.5mm
Connector nut/screw:	Brass with nickel plated	IP rating:	IP68 in locked condition
Connector body:	PA+GF	Mating endurance:	>500 cycles
Seal / O-ring:	FKM		

### Electrical data & Mechanical data

Contacts	Available Coding				Contacts termination	Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.
	A	B	C	D			A/C	D/C	AWG	mm²		
03 pins					Solder version	4A	250V	250V	22AWG	0.34	PUR/PVC or customized	MB12FAAFF03ST MB12FABFF03ST MB12FACFF03ST
04 pins					Solder version	4A	250V	250V	22AWG	0.34	PUR/PVC or customized	MB12FAAFF04ST MB12FABFF04ST MB12FACFF04ST MB12FADFF04ST
05 pins					Solder version	4A 2A (C-code)	60V	60V	22AWG 24AWG (C-code)	0.34 0.25 (C-code)	PUR/PVC or customized	MB12FAAFF05ST MB12FABFF05ST MB12FACFF05ST
06 pins					Solder version	2A	30V	30V	24AWG	0.25	PUR/PVC or customized	MB12FACFF05ST
08 pins					Solder version	2A	30V	30V	24AWG	0.25	PUR/PVC or customized	MB12FAAFF05ST
12 pins					Solder version	1.5A	30V	30V	26AWG	0.14	PUR/PVC or customized	MB12FAAFF05ST

### Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.