




M12 Male Molded Cable, Straight, Y2-coding, Shielded

- Connector series: M12
 - Gender: Male
 - Coding: Y2
 - Locking type: Fix screw
 - Mounting type: Straight
 - Part No.: MA12MSY2F08STXXXXXX
- X refers to cable specification

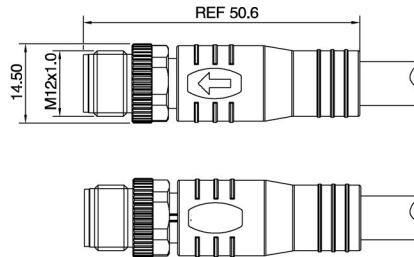

General information

Standard:	IEC 61076-2-113
Ambient temperature:	-40°C ~ +80°C(fixed installation) -20°C ~ +80°C(flexible installation)
Connector insert:	PA+GF
Connector contacts:	Brass with gold plated
Connector overmold:	TPU
Connector nut/screw:	Brass with nickel plated
Seal / O-ring:	FKM

Insulation resistance:	$\geq 100\text{M}\Omega$
Contact resistance :	$\leq 10\text{m}\Omega$
Shielding:	Available
IP rating:	IP67 in locked condition
Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts		Rated current	Voltage		Wire gauge / size		Cable jacket	Wire insulation	Part No.
			A/C	D/C	AWG	mm ²			
08 pins		6A (Power pins)	50V	50V	20AWG (Power pins)	0.6 (Power pins)	PUR / PVC	PP	MA12MSY2F08STXXXXXX
		0.5A (Signal pins)			26AWG (Signal pins)	0.15 (Signal pins)			

Note: X refers to cable specification

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.