




M12 Male Panel Mount, Solder, Rear fastened, Adjustable Nut

- Connector series: M12
- Gender: Male
- Coding: A,B,C,D
- Locking type: Fix screw
- Mounting type: Rear fastened
- Part No.: MB12MS*RF**ST-X(Adjustable)

* refers to coding type
** refers to pins number
X refers to Chassis-side thread size

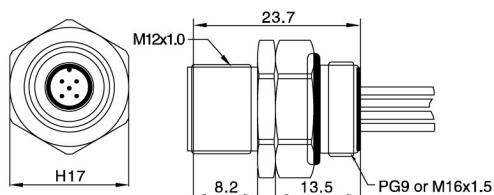

General information

Standard:	IEC 61076-2-101	Insulation resistance:	≥ 100MΩ
Ambient temperature:	-20°C ~ +90°C	Contact resistance :	≤ 5mΩ
Connector insert:	TPU	Shielding:	Unavailable
Connector contacts:	Brass with gold plated	IP rating:	IP68 in locked condition
Connector nut/screw:	Brass with nickel plated	Panel cut-out:	Refer to page 287
Seal / O-ring:	Epoxy resin / FKM	Mating endurance:	>500 cycles

Electrical data & Mechanical data

Contacts	Available Coding				Contacts termination	Rated current	Voltage		Wire gauge / size		Part No.
	A	B	C	D			A/C	D/C	AWG	mm ²	
03 pins					Solder version	4A	250V	250V	22AWG	0.34	MB12MSARF03ST-X(adj) MB12MSBRF03ST-X(adj) MB12MSCRF03ST-X(adj)
04 pins					Solder version	4A	250V	250V	22AWG	0.34	MB12MSARF04ST-X(adj) MB12MSBRF04ST-X(adj) MB12MSCRF04ST-X(adj) MB12MSDRF04ST-X(adj)
05 pins					Solder version	4A 2A (C-code)	60V	60V	22AWG 24AWG (C-code)	0.34 0.25 (C-code)	MB12MSARF05ST-X(adj) MB12MSBRF05ST-X(adj) MB12MSCRF05ST-X(adj)
06 pins					Solder version	2A	30V	30V	24AWG	0.25	MB12MSCRF06ST-X(adj)
08 pins					Solder version	2A	30V	30V	24AWG	0.25	MB12MSARF08ST-X(adj)
12 pins					Solder version	1.5A	30V	30V	26AWG	0.14	MB12MSARF12ST-X(adj)
17 pins					Solder version	1.5A	30V	30V	26AWG	0.14	MB12MSARF17ST-X(adj)

Note: X refers to Chassis-side thread size

Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm².
- Please refer to Page 96 for products' part number encoding rule.