




## M8 Male Field Wirable Assembly, Straight, Solder

- Connector series: M8
- Gender: Male
- Coding: A,B
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: MB08MA\*FF\*\*ST

\* refers to coding type  
\*\* refers to pins number

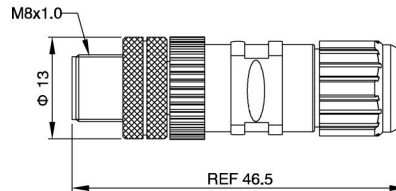

### General information

Standard:	IEC 61076-2-104
Ambient temperature:	-25 °C ~ +90 °C
Connector insert/body:	TPU; PA
Connector contacts:	Brass with gold plated
Connector nut/screw:	Brass with nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance:	≤ 5mΩ
Shielding:	Unavailable
Suitable cable Dia:	3.5~5.0mm
IP rating:	IP67 in locked condition
Mating endurance:	>500 cycles

### Electrical data & Mechanical data

Contacts	Contacts termination	Rated current	Voltage		Wire gauge / size		Cable jacket	Part No.
			A/C	D/C	AWG	mm <sup>2</sup>		
03 pins  (A-coding)	Solder version	3A	50V	60V	24AWG	0.25	PUR / PVC	MB08MAAFF03ST
04 pins  (A-coding)	Solder version	3A	50V	60V	24AWG	0.25	PUR / PVC	MB08MAAFF04ST
05 pins  (B-coding)	Solder version	3A	30V	30V	24AWG	0.25	PUR / PVC	MB08MABFF05ST
06 pins  (A-coding)	Solder version	1.5A	30V	30V	26AWG	0.14	PUR / PVC	MB08MAAFF06ST
08 pins  (A-coding)	Solder version	1.5A	30V	30V	26AWG	0.14	PUR / PVC	MB08MAAFF08ST

### Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm<sup>2</sup>.
- Please refer to Page 22 for products' part number encoding rule.