

NOTES:

1. MATERIALS: "G" STYLE

1.1 SHELL, FERRULE

BRASS PER QQ-B-626

FINISH: GOLD, OVER

ELECTROLESS NICKEL

PER MIL-G-45204, TYP 2, CLASS 1

1.2 INSERT

PEEK, GLASS FILLED PER

MIL-P-46183

1.3 CONTACTS

COPPER ALLOY

FINISH: GOLD PER MIL-G-45204

1.4 GASKETS

SILICONE RUBBER PER AMS 3304

1.5 ALTERNATE SHELL MATERIALS

AND FINISHES:

"M" STYLE: BRASS, WITH

ELECTROLESS NICKEL FINISH

PER AMS-C-26074, CLASS 4, GRADE B

"A" STYLE: BRASS, WITH GOLD PLATE,

BLACK CHROMATE

"K" STYLE: STAINLESS STEEL,


300 SERIES, WITH PASSIVATION

REVISION HISTORY

REVISION	DATE	COMMENT
0	02 /10 / 17	INITIAL RELEASE


4,5 X 0,35 THREAD

4,5 X 0,35 THREAD

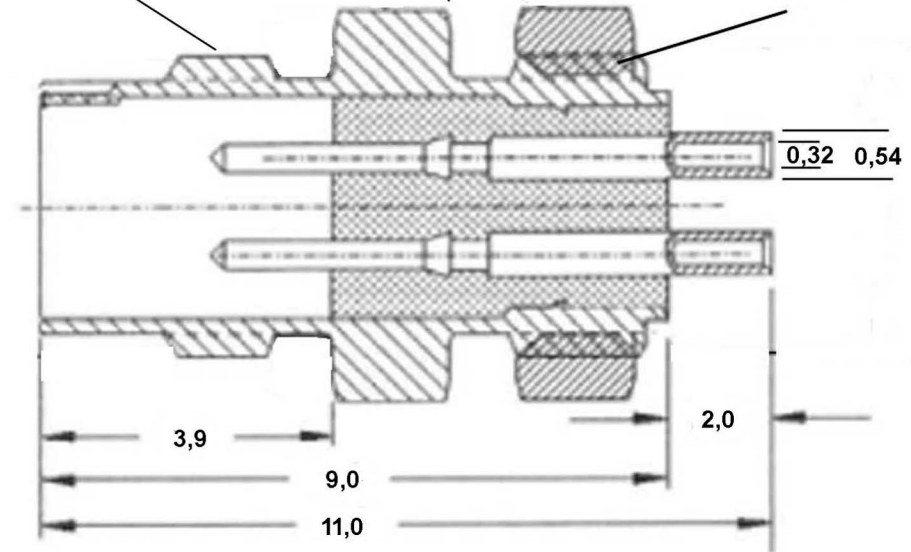


0,32 +0.00/ - 0.02


0,32 +0.00/ - 0.02

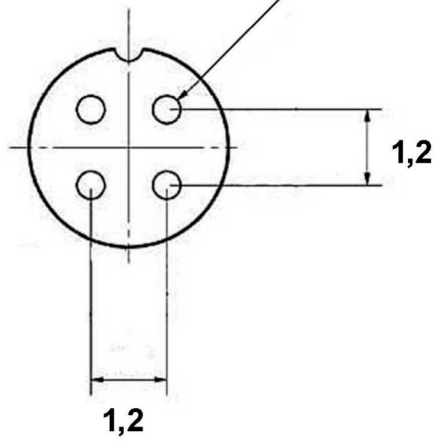

4 POSITION

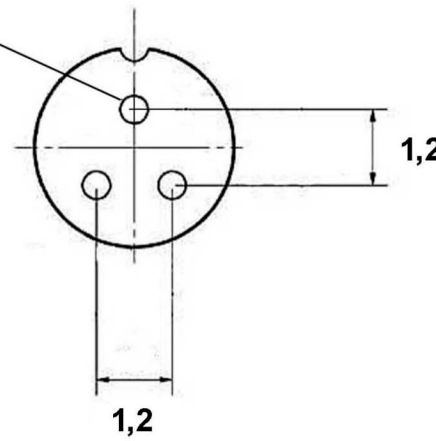

3 POSITION

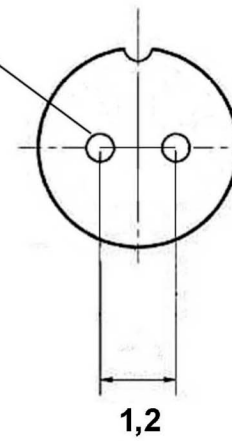

2 POSITION

UNLESS OTHERWISE NOTED:
DIMENSIONS ARE IN MILLIMETERS
DO NOT SCALE THIS DRAWING

.X DECIMALS ARE ± 0.5
.XX DECIMALS ARE ± 0.25
.XXX DECIMALS ARE ± 0.13

ANGLES ARE $\pm 0.5^\circ$

DRAWING

SC

MILSPECWEST - MICRO PRODUCTS
CAGE CODE: 3HD49

CHECKED

TS

DESCRIPTION:
**ULTRA MICRO JAM NUT
MOUNT RECEPTACLE**

Q.A.

KB

DWG. NO.
MSWU*-D-***

REVISION: 0

SHEET 1 OF 2

THIS DOCUMENT IS SOLE PROPERTY OF MILSPECWEST AND IS ISSUED IN STRICT CONFIDENCE THAT IT WILL NOT BE REPRODUCED IN ANY WAY OR USED TO SOLICIT BUSINESS OF A COMPETITIVE NATURE. DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN CONSENT IS OBTAINED FROM MILSPECWEST. THIS DOCUMENT IS SUITABLE FOR ENGINEERING EVALUATION AND MAY BE USED IN TECHNICAL SPECIFICATIONS.

	1	2	3	4	5	6	7	8
A	NOTES: 1. MATERIALS: "G" STYLE 1.1 SHELL, FERRULE BRASS PER QQ-B-626 FINISH: GOLD, OVER ELECTROLESS NICKEL PER MIL-G-45204, TYP 2, CLASS 1 1.2 INSERT PEEK, GLASS FILLED PER MIL-P-46183 1.3 CONTACTS COPPER ALLOY FINISH: GOLD PER MIL-G-45204 1.4 GASKETS SILICONE RUBBER PER AMS 3304 1.5 ALTERNATE SHELL MATERIALS AND FINISHES: "M" STYLE: BRASS, WITH ELECTROLESS NICKEL FINISH PER AMS-C-26074, CLASS 4, GRADE B "A" STYLE: BRASS, WITH GOLD PLATE, BLACK CHROMATE "K" STYLE: STAINLESS STEEL, 300 SERIES, WITH PASSIVATION					REVISION HISTORY		
						REVISION	DATE	COMMENT
						0	02/17/2017	
B	SPECIFICATIONS:					-		
B								
B								
B	ELECTRICAL:					ELECTRICAL RESISTANCE: 10,000 M OHMS PER MIL-C-22557 RATED WORKING VOLTAGE: 400V @ SEA LEVEL DIELECTRICWITHSTANDING: 1,000 V @ SEA LEVEL PER MIL-C-22557 CONTACT VOLTAGE DROP: 4 mV @ 1 AMP PER MIL-C-22557 CONTACT RESISTANCE: 4 MOHM @ 1 AMP PER MIL-C-22557 CONTACT CURRENT RATING: 3 AMP		
B								
B								
C	ENVIRONMENTAL:					VIBRATION: MIL STD 202A METHOD 204 TEST COND B(15G's) NO DISCONTINUITY IN EXCESS OF 1 MICROSECOND SHOCK: MIL STD 202 METHOD 202, 300 G's NO EVIDENCE OF DAMAGE TEMPERATURE CYCLING: MIL STD 202 METHOD 102, CONDITION C CORROSION (SALT SPRAY): MIL STD 202 METHOD 10,COND B 5% SALT SOLUTION MOISTURE RESISTANCE: MIL STD 202C METHOD 106B, OMITTING STEO 7B AND HIGH HUMIDITY TESTS		
C								
C								
D	MECHANICAL:					CONTACTS: CONTACTS ARE CONTRAINED IN BOTH DIRECTIONS ENGAGING FORCE: 0.8NPER CONTACT COUPLING RETENTION TORQUE: 60 Nmm CONTACT DURABILITY: 5000 CYCLES WITHH CONTACT RESISTANCE WITHIN MIN MIL-C-22557 CABLE RETENTION: SEPARATION FORCE EQUAL TO BREAKING STRENGTH OF SHIELD OF THE CABLE PER MIL-C-22557		
D								
D								
E	PART NUMBER BREAKDOWN					UNLESS OTHERWISE NOTED: DIMENSIONS ARE IN MILLIMETERS DO NOT SCALE THIS DRAWING .X DECIMALS ARE ±0.5 .XX DECIMALS ARE ±0.25 .XXX DECIMALS ARE ±0.13 ANGLES ARE ±0.5°		
E								
E								
F	MSWU - G - D - 04 P					DRAWING	SC	MILSPECWEST - MICRO PRODUCTS CAGE CODE: 3HD49
								DESCRIPTION: ULTRA MICRO JAM NUT MOUNT RECEPTACLEE
						Q.A.	KB	DWG. NO. MSWU-*-D*-.***
THIS DOCUMENT IS SOLE PROPERTY OF MILSPECWEST AND IS ISSUED IN STRICT CONFIDENCE THAT IT WILL NOT BE REPRODUCED IN ANY WAY OR USED TO SOLICIT BUSINESS OF A COMPETITIVE NATURE. DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN CONSENT IS OBTAINED FROM MILSPECWEST. THIS DOCUMENT IS SUITABLE FOR ENGINEERING EVALUATION AND MAY BE USED IN TECHNICAL SPECIFICATIONS.					REVISION: 0		SHEET 2 OF 2	
	1	2	3	4	5	6	7	8