


- NOTES:
- 1. MATERIALS: "G" STYLE
    - 1.1 SHELL, FERRULE  
BRASS PER QQ-B-626  
FINISH: GOLD, OVER  
ELECTROLESS NICKEL  
PER MIL-G-45204, TYP 2, CLASS 1
    - 1.2 INSERT  
PEEK, GLASS FILLED PER  
MIL-P-46183
    - 1.3 CONTACTS  
COPPER ALLOY  
FINISH: GOLD PER MIL-G-45204
    - 1.4 GASKETS (OPTIONAL)  
SILICONE RUBBER PER AMS 3304
    - 1.5 ALTERNATE SHELL MATERIALS  
AND FINISHES:  
"M" STYLE: BRASS, WITH  
ELECTROLESS NICKEL FINISH  
PER AMS-C-26074, CLASS 4, GRADE B  
"A" STYLE: BRASS, WITH GOLD PLATE,  
BLACK CHROMATE  
"K" STYLE: STAINLESS STEEL,  
300 SERIES, WITH PASSIVATION

REVISION HISTORY		
REVISION	DATE	COMMENT



Layout

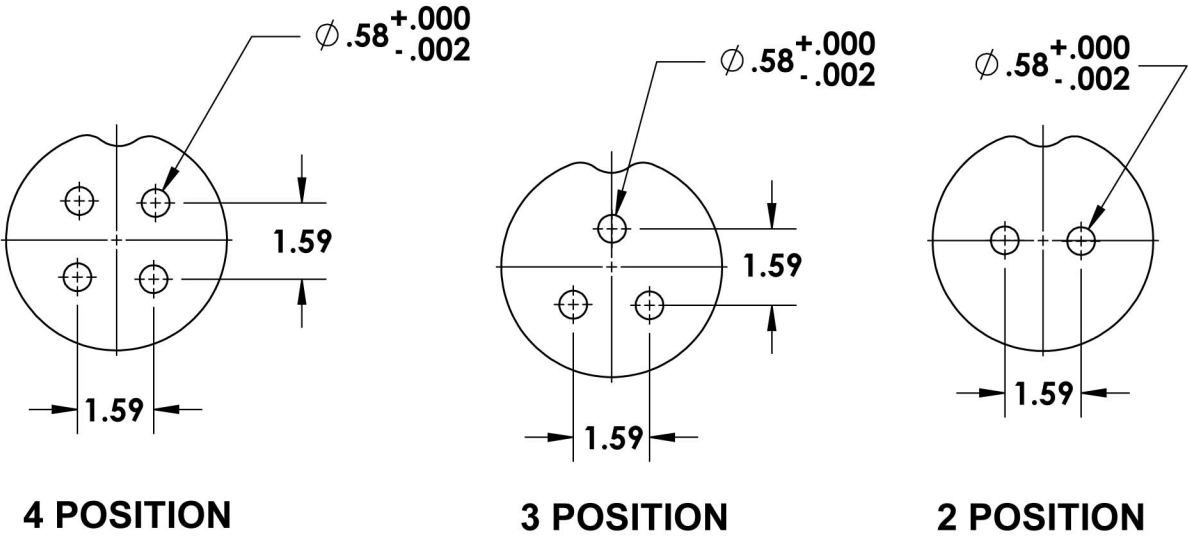

THIS DOCUMENT IS SOLE PROPERTY OF MILSPECWEST AND IS ISSUED IN STRICT CONFIDENCE THAT IT WILL NOT BE REPRODUCED IN ANY WAY OR USED TO SOLICIT BUSINESS OF A COMPETITIVE NATURE. DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN CONSENT IS OBTAINED FROM MILSPECWEST. THIS DOCUMENT IS SUITABLE FOR ENGINEERING EVALUATION AND MAY BE USED IN TECHNICAL SPECIFICATIONS.

UNLESS OTHERWISE NOTED: DIMENSIONS ARE IN MILLIMETERS DO NOT SCALE THIS DRAWING  .X DECIMALS ARE ±0.5 .XX DECIMALS ARE ±0.25 .XXX DECIMALS ARE ±0.13  ANGLES ARE ±0.5°	DRAWING	SC	MILSPECWEST- MICRO PRODUCTS	
	CHECKED	TS	DESCRIPTION: MICRO JAM NUT MOUNT RECEPTACLE	
	Q.A.	KB	DWG. NO. MSW-G-D***	REVISION: 0 SHEET 1 OF 2

	1	2	3	4	5	6	7	8		
A	<div>NOTES:</div> <div>1. MATERIALS: "G" STYLE</div> <div>1.1 SHELL, FERRULE</div> <div>BRASS PER QQ-B-626</div> <div>FINISH: GOLD, OVER</div> <div>ELECTROLESS NICKEL</div> <div>PER MIL-G-45204, TYP 2, CLASS 1</div> <div>1.2 INSERT</div> <div>PEEK, GLASS FILLED PER</div> <div>MIL-P-46183</div> <div>1.3 CONTACTS</div> <div>COPPER ALLOY</div> <div>FINISH: GOLD PER MIL-G-45204</div> <div>1.4 GASKETS</div> <div>SILICONE RUBBER PER AMS 3304</div> <div>1.5 ALTERNATE SHELL MATERIALS</div> <div>AND FINISHES:</div> <div>"M" STYLE: BRASS, WITH</div> <div>ELECTROLESS NICKEL FINISH</div> <div>PER AMS-C-26074, CLASS 4, GRADE B</div> <div>"A" STYLE: BRASS, WITH GOLD PLATE,</div> <div>BLACK CHROMATE</div> <div>"K" STYLE: STAINLESS STEEL,</div> <div>300 SERIES, WITH PASSIVATION</div> <div>PART NUMBER BREAKDOWN</div> <div>MSW - G - D - 04 P</div> <div>P = PIN</div> <div>S = SOCKET</div> <div>NUMBER OF CONTACTS</div> <div>02</div> <div>03</div> <div>04</div> <div>SHELL SIZE (SEE TABLE 2)</div> <div>BODY STYLE</div> <div>B = PLUG</div> <div>R = IN LINE RECEPTACLE</div> <div>C = STRAIGHT PCB MOUNT</div> <div>D = FRONT PANEL JAM NUT MOUNT</div> <div>E = FRONT PANEL SOLDER MOUNT</div> <div>F = RIGHT ANGLE PCB MOUNT</div> <div>FINISH AND MATERIAL</div> <div>G = BRASS WITH GOLD OVER ELEC NICKEL</div> <div>M = BRASS WITH ELECTROLESS NICKEL</div> <div>A = BRASS WITH BLACK ANODIZE</div> <div>K = STAINLESS STEEL WITH PASSIVATION</div> <div>BASIC PART NUMBER</div>					REVISION HISTORY				
						REVISION	DATE	COMMENT		
						0	02/17/2017			
B	<div>SPECIFICATIONS:</div> <div>ELECTRICAL:</div> <div>ELECTRICAL RESISTANCE:</div> <div>10,000 M OHMS PER MIL-C-22557</div> <div>RATED WORKING VOLTAGE:</div> <div>400V @ SEA LEVEL</div> <div>DIELECTRICWITHSTANDING:</div> <div>1,000 V @ SEA LEVEL PER MIL-C-22557</div> <div>CONTACT VOLTAGE DROP:</div> <div>4 mV @ 1 AMP PER MIL-C-22557</div> <div>CONTACT RESISTANCE:</div> <div>4 MOHM @ 1 AMP PER MIL-C-22557</div> <div>CONTACT CURRENT RATING:</div> <div>3 AMP</div> <div>ENVIRONMENTAL:</div> <div>VIBRATION:</div> <div>MIL STD 202A METHOD 204 TEST COND B ( 15G's)</div> <div>NO DISCONTINUITY IN EXCESS OF 1 MICROSECOND</div> <div>SHOCK:</div> <div>MIL STD 202 METHOD 202, 300 G's NO EVIDENCE OF DAMAGE</div> <div>TEMPERATURE CYCLING:</div> <div>MIL STD 202 METHOD 102, CONDITION C</div> <div>CORROSION ( SALT SPRAY):</div> <div>MIL STD 202 METHOD 10,COND B 5% SALT SOLUTION</div> <div>MOISTURE RESISTANCE:</div> <div>MIL STD 202C METHOD 106B, OMITTING STEO 7B</div> <div>AND HIGH HUMIDITY TESTS</div> <div>MECHANICAL:</div> <div>CONTACTS:</div> <div>CONTACTS ARE CONTRAINED IN BOTH DIRECTIONS</div> <div>ENGAGING FORCE:</div> <div>0.8NPER CONTACT</div> <div>COUPLING RETENTION TORQUE:</div> <div>60 Nmm</div> <div>CONTACT DURABILITY:</div> <div>5000 CYCLES WITHH CONTACT RESISTANCE</div> <div>WITHIN MIN MIL-C-22557</div> <div>CABLE RETENTION:</div> <div>SEPARATION FORCE EQUAL TO BREAKING STRENGTH</div> <div>OF SHIELD OF THE CABLE PER MIL-C-22557</div>									
C										
D										
E										
F	<div>THIS DOCUMENT IS SOLE PROPERTY OF MILSPECWEST AND IS ISSUED IN STRICT CONFIDENCE THAT IT WILL NOT BE REPRODUCED IN ANY WAY OR USED TO SOLICIT BUSINESS OF A COMPETITIVE NATURE. DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN CONSENT IS OBTAINED FROM MILSPECWEST. THIS DOCUMENT IS SUITABLE FOR ENGINEERING EVALUATION AND MAY BE USED IN TECHNICAL SPECIFICATIONS.</div>					UNLESS OTHERWISE NOTED: DIMENSIONS ARE IN MILLIMETERS DO NOT SCALE THIS DRAWING	DRAWING	SC	MILSPECWEST - MICRO PRODUCTS CAGE CODE: 3HD49	
						.X DECIMALS ARE ±0.5 .XX DECIMALS ARE ±0.25 .XXX DECIMALS ARE ±0.13	CHECKED	TS	DESCRIPTION: MICRO JAM NUT MOUNT RECEPTACLE	
							ANGLES ARE ±0.5°	Q.A.	KB	DWG. NO. MSW-*-D-***
	1	2	3	4	5	6	7	8		