




# PSG.0B.303.CLAD25Z

PUSH-PULL PLUG, 3 PIN CONTACTS,  
SOLDER, 2.5 MM COLLET, STRAIN RELIEF NUT

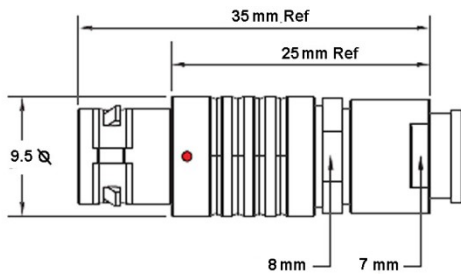

CONTACT INFO		DIA mm
MALE	FEMALE	
		0.5

KEY SPECIFICATIONS	
CONNECTOR SERIES	PSG
CONNECTOR SIZE	0B
CONNECTOR GENDER	MALE
CODING	G
LOCKING STYLE	SELF LOCKING
ATTACHMENT METHOD	SOLDER
IP RATING	IP 50
COLLET SIZE	2.5 MM
STANDARD MATE SERIES	FSG

GENERAL SPECIFICATIONS	
TEMPERATURE RANGE	-55 DEG C - + 200 DEG C
INSULATOR MATERIAL	PEEK
SOLDER CONTACT MATERIAL	COPPER ALLOY, GOLD PLATED
CONNECTOR BODY MATERIAL	BRASS, NICKEL PLATED
COUPLING NUT, SCREW	BRASS, CHROME PLATED
INSULATION RESISTANCE	EQUAL OR GREATER THAN 100 M-OHMS