


MSW STRIP CONNECTORS

0.062 (1.57mm) CENTERS
FOR 32 AWG – 26 AWG WIRES

High density, space saving connectors for a wide range of applications. Available in 2 thru 15 positions with 24 AWG gold plated solder contacts and durable glass filled PEEK insulators.

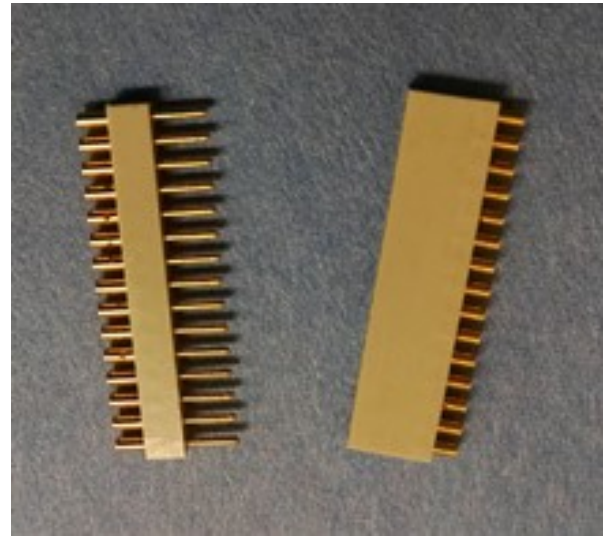

KEY SPECIFICATIONS0	
INSULATORS	GLASS FILLED PEEK
CONTACTS	COPPER ALLOW, GOLD PLATED
NO of CONTACTS	2 - 15
WIRE SIZE	32 AWG - 26 AWG
CONTACT TERMINATION	SOLDER or PCB*
COUPLING	FRICTION
CONTACT SPACING	0.062 (1.57 mm)
TEMPERATURE RANGE	-55 DEG C - +125 DEG C
INSULATION RESISTANCE	6 MILIHMS MIN @ 500 VOLTS DC
DIALECTRIC WITHSTANDING VOLTAGE	500 VAC @ SEA LEVEL
* Contact Factory	

