




FSG.1B.303.CLL

PUSH-PULL FXIED SOCKET RECEPTACLE

3 CONTACTS, SOLDER

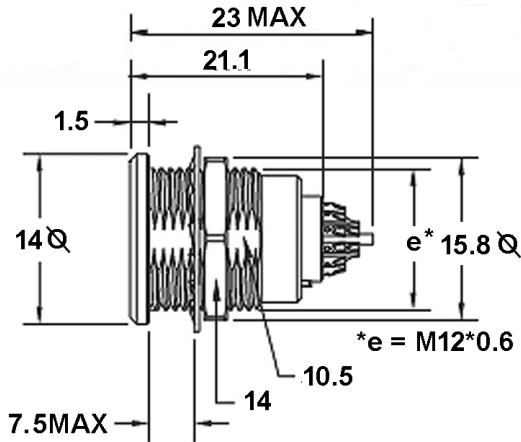

CONTACT INFO		DIA mm
MALE	FEMALE	
		1.3

KEY SPECIFICATIONS	
CONNECTOR SERIES	FSG
CONNECTOR SIZE	1B
CONNECTOR GENDER	FEMALE
CODING	G
LOCKING STYLE	SELF LOCKING
ATTACHMENT METHOD	SOLDER
IP RATING	IP 50
STANDARD MATE SERIES	PSG

GENERAL SPECIFICATIONS	
TEMPERATURE RANGE	-55 DEG C - + 200 DEG C
INSULATOR MATERIAL	PEEK
SOLDER CONTACT MATERIAL	COPPER ALLOY, GOLD PLATED
CONNECTOR BODY MATERIAL	BRASS, NICKEL PLATED
COUPLING NUT, SCREW	BRASS, CHROME PLATED
INSULATION RESISTANCE	EQUAL OR GREATER THAN 100 M-OHMS

MILSPECWEST - The Very Best in Micro Interconnect Products
 AEROSPACE * MEDICAL * AUTOMOTIVE * INDUSTRIAL * MICRO-ELECTRONICS
milspecwest.com sales@milspecwest.com 949-636-9677