




# FSG.2B.319.CLL

## PUSH-PULL FXIED SOCKET RECEPTACLE

### 19 CONTACTS, SOLDER

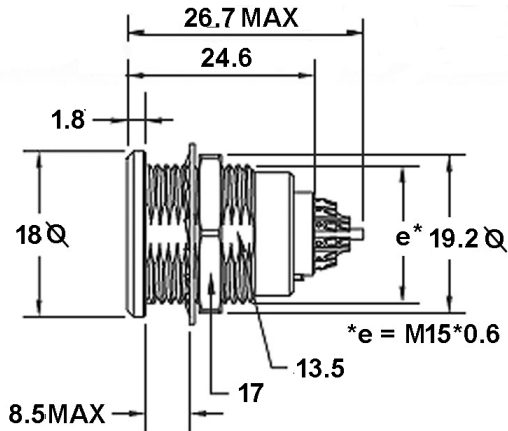

CONTACT INFO		DIA mm
MALE	FEMALE	
		<b>0.7</b>

KEY SPECIFICATIONS	
CONNECTOR SERIES	FSG
CONNECTOR SIZE	2B
CONNECTOR GENDER	FEMALE
CODING	G
LOCKING STYLE	SELF LOCKING
ATTACHMENT METHOD	SOLDER
IP RATING	IP 50
STANDARD MATE SERIES	PSG

GENERAL SPECIFICATIONS	
TEMPERATURE RANGE	-55 DEG C - + 200 DEG C
INSULATOR MATERIAL	PEEK
SOLDER CONTACT MATERIAL	COPPER ALLOY, GOLD PLATED
CONNECTOR BODY MATERIAL	BRASS, NICKEL PLATED
COUPLING NUT, SCREW	BRASS, CHROME PLATED
INSULATION RESISTANCE	EQUAL OR GREATER THAN 100 M-OHMS