




## M12 Male Panel, Solder & Crimp, Rear fastened, L-coding

- Connector series: M12
- Gender: Male
- Coding: L
- Locking type: Fix screw
- Mounting type: Rear fastened
- Part No.: MB12M\*LRF\*\*ST-X

\* refer to terminal type

\*\* refers to pins number

X refers to Chassis-side thread size

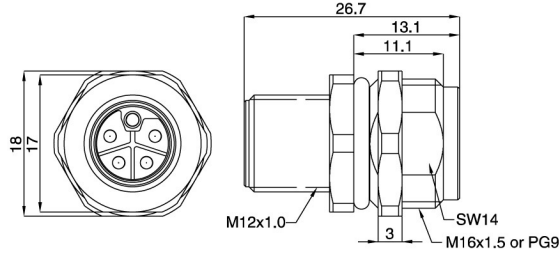

### General information

Standard:	IEC 61076-2-111
Ambient temperature:	-40°C ~ +80°C(fixed installation) -20°C ~ +80°C(flexible installation)
Connector insert:	PA
Connector contacts:	Brass with gold plated
Connector nut/screw:	Brass with nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 5mΩ
Shielding:	Unavailable
IP rating:	IP68 in locked condition
Mating endurance:	>500 cycles

### Electrical data & Mechanical data

Contacts	Contacts termination	Rated current	Voltage		Wire gauge / size		Part No.
			A/C	D/C	AWG	mm <sup>2</sup>	
05 pins  (4+PE)	Crimp & Solder	16A	NC	63V	14AWG	2.0	MB12M <u>S</u> LRF05ST- <u>X</u> MB12M <u>C</u> LRF05ST- <u>X</u>

Note: X refers to Chassis-side thread size, S: Solder C: Crimp

### Remarks

- Please refer to Page 578 for the Conversion between American Wire Gauge AWG and Wire Cross-section mm<sup>2</sup>.
- Please refer to Page 96 for products' part number encoding rule.